


Portable Tripod Screen Operation Manual

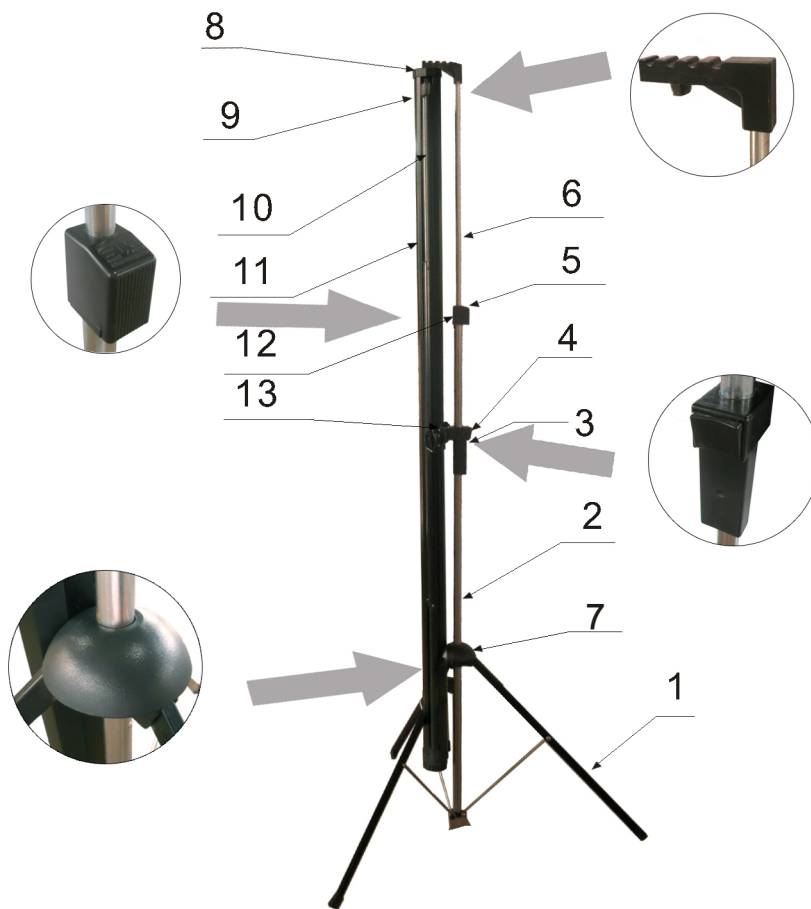

1.tripod 2.support tube 3.handle 4.handle button 5.adjust key 6.adjust tube 7.tripod fork 8.topside tow bar 9.poling 10.screen 11.housing 12.extremity tube 13.rotary locking piece

Installation and Operation of Screens

- Open the packing box and remove all packaging;
- Place the screen vertically;
- Press adjust key(5),pull upward adjust tube(6) to pull out screen housing from lower extending tube of topside tow bar. At the moment the screen housing can rotate freely.
- Rotate the screen housing to be close to the horizontal level(openings upward). Hold screen housing by one hand and lift up slightly to leave from the ground. Press downward tripod fork(7) and hand down the assembly after pulling off the tripod.
- Slightly pull screen out of the screen housing then hang the screen on the whirling arm.
- Press adjust key by one hand and pull upward adjust tube(6) by the other hand. you can make it stopped at any level that you want..