


Tripod Projection Screen Operation Manual

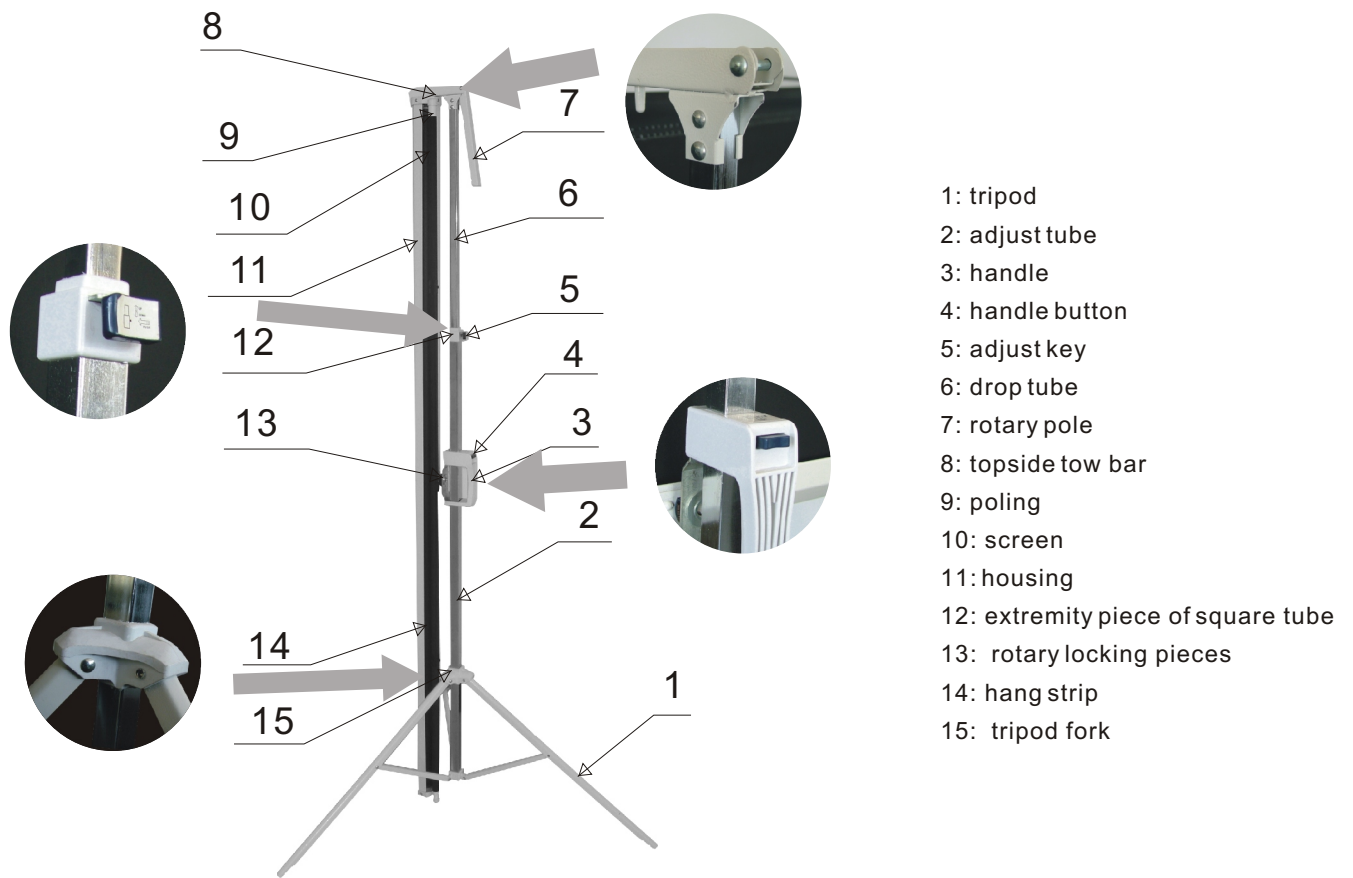

Installation and Operation of Screens

- Open the packing box and remove all packaging;
- Place the screen vertically ;
- Press adjust key (5), pull upward drop tube (6) to pull out screen housing from lower extending tube of topside tow bar. At the moment the screen housing can rotate freely.
- Rotate the screen housing to be close to the horizontal level (openings upward). Hold screen housing by one hand and lift up slightly to leave from the ground . Press downward tripod fork (15) and hand down the assembly after pulling off the tripod.
- Rotate the upper rotary pole (7) to place on the topside tow bar (8) horizontally.
- Slightly pull screen out of the screen housing then hang the hang strip (14) on the opening of whirling arm.
- Press adjust key by one hand and pull upward drop tube (6) by the other hand until drop tube is locked.